

Please rewrite the paragraph on page 29, lines 7-10 as follows:

(Amended) On the control board 6 are mounted chips 61, 61 as a controller that performs the drive control of the position controller 5 and the inner-rotor motor, and a capacitor 62, and so forth.

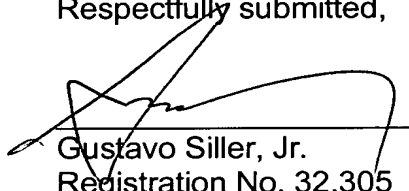
Please rewrite the paragraph on page 39, lines 11-18 as follows:

(Amended) Here, the spacing between the cut-out 15 and the cut-out 16 is set larger than the spacing between the cut-out 12 and the cut-out 13, or the spacing between the cut-out 12 and the cut-out 14; accordingly, the magnetic fluxes from the magnet 25 fall much more on the chassis 1, and the downward thrust acting on the rotor 2 becomes larger. Therefore, the upper ends of the magnetic balancers 80, 90 are to be set at a higher position than the upper end of the magnetic balancer 7.

#### REMARKS

Applicant has rewritten portions of the specification. The changes from the previous version to the rewritten version are shown in attached Appendix A, with strikethrough for deleted matter and underlining for added matter.

Respectfully submitted,

  
Gustavo Siller, Jr.  
Registration No. 32,305  
Attorney for Applicant

BRINKS HOFER GILSON & LIONE  
P.O. BOX 10395  
CHICAGO, ILLINOIS 60610  
(312) 321-4200